


P1:	M-Y139A
	M-139B
P2,P3:	M-Y139H
	M-139H
P4:	M-426E

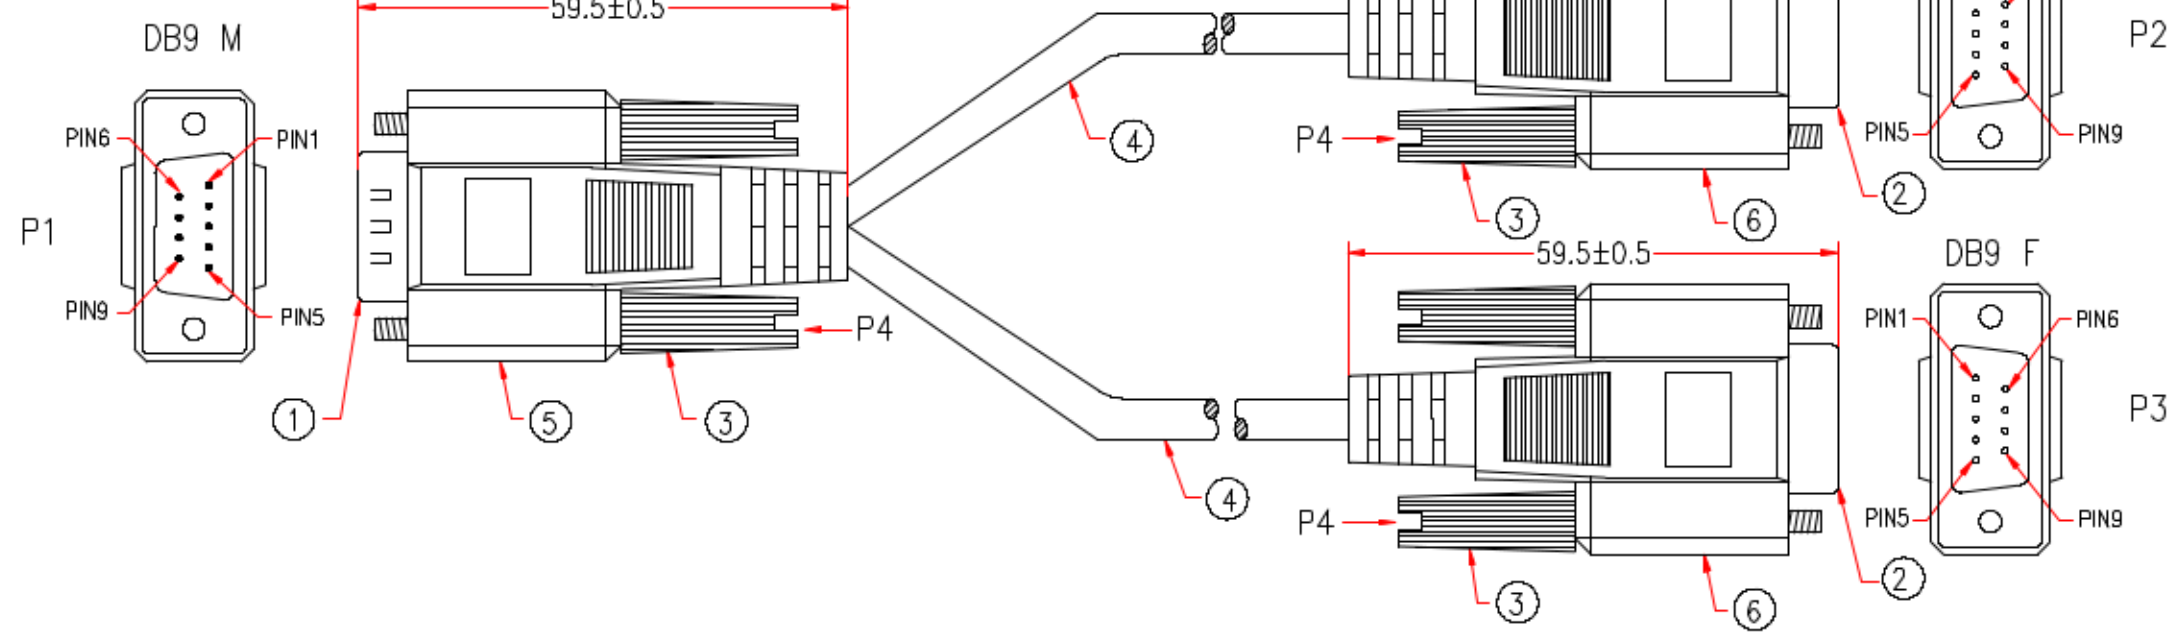

1E13					
P2	P1	P3			
1	1	1	BROWN		
2	2	2	RED		
3	3	3	ORANGE		
4	4	4	YELLOW		
5	5	5	GREEN		
6	6	6	BLUE		
7	7	7	PURPLE		
8	8	8	GRAY		
9	9	9	BLACK		
SHIELD	SHIELD	SHIELD			

NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	QTY	Supplier
5&6	BLACK PVC TUBE Ø3.0*22mm	3	M304
	ALUMINUM FOIL 33*65mm	3	M579
	MOLDED PE COLOR TRANSPARENT		M280
	MOLDED PVC BEIGE		M304
4	NON-UL 9C 28AWG, ALUM-MYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING No. EMAL2809C-051	290mm*2	M304
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE	6	M95
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	2	M108
1	DB9 MALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR	1	M108

APPROVED		PCCABLES.COM INC	Cable Length Unless Other Spec. Tolerances: D ~200mm ±10mm 201~1000mm ±20mm 1001 ~1500mm ±25mm 1501~2100mm ±30mm 2100mm↑ ±40mm
CHECKED	HU		
DRAWING	PEGN		
DATE	01/JUN/12		
ITEM NO.		00819	UNIT:mm

CHECKED

