



Tabel:

Length	Part No.
915±30mm	
1830±40mm	
3050±50mm	
4575±50mm	

Electrical Test:

- 100%Test(Open, short, miss wire)
- Contact Resistance: 2 ohm max.
- Insulation Resistance: 10M ohm min.
- Hi-pot: 300V DC/10ms

Pin Assignment

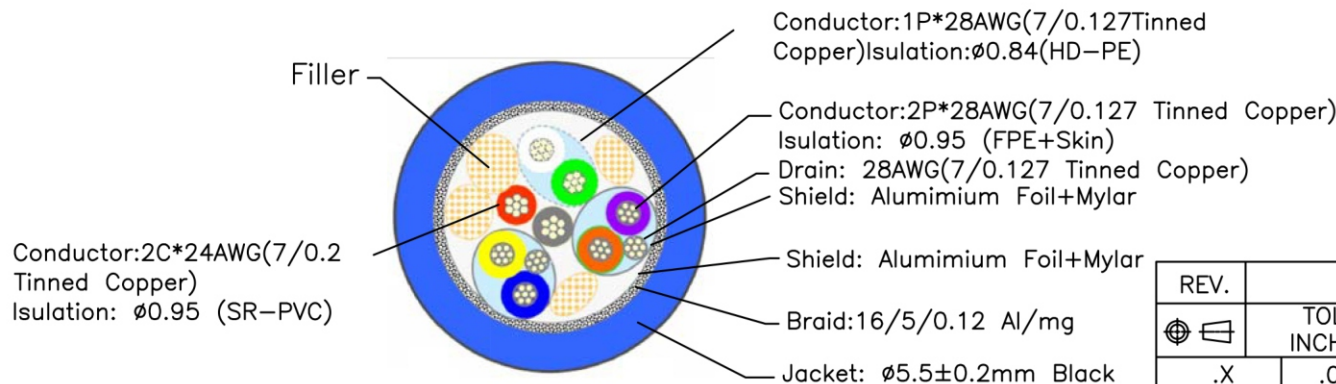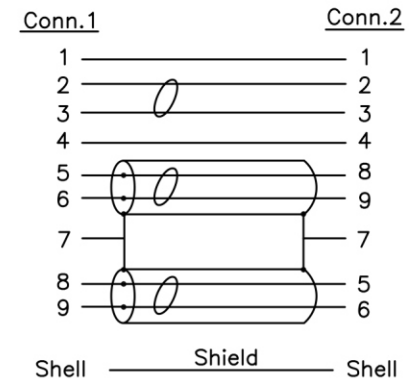

REV.	TOLERANCE		DESCRIPTION	DATE
	INCHES	M/M	PCCABLES.COM INC.	
⊕	.X	.015 .30	TITLE: USB 3.0 AM TO AM Cable	
	.XX	.010 .10	CUSTOMER :	
	.XXX	.005 .05	CUSTOMER NO.:	
			CHECK BY	SCALE NONE
			APPD BY	UNIT MM
				DATE 10.09.02
				DRAWING NO.:
				REV. A
				1/1

NO.	DESCRIPTION	Q'TY	UNIT
③	Outside Molding: 45P PVC Color: Black	16	g
②	USB 3.0 A Type M Pin Gold Plated, Shell Nickel, Blue Insulation	2	Set
①	Super High Speed USB 3.0 Cable UL2725 (7/0.127T*1P+AL+D+MY)*2C+7/0.127T*1P+7/0.2T*2C+AL+MY+DW+BD OD:5.5±0.2mm Color: Black	L	M